| DISTRICT | COUNTY | ROUTE | PROJECT | SHEET |
|---|---|---|---|---|
| 8-0 | YORK | I-83 | | |

MANCHESTER, SPRINGETTSBURY, & SPRING GARDEN TWPS

REVISIONS

*SB NOT ELIGIBLE – INSUFFICIENT SPACE*

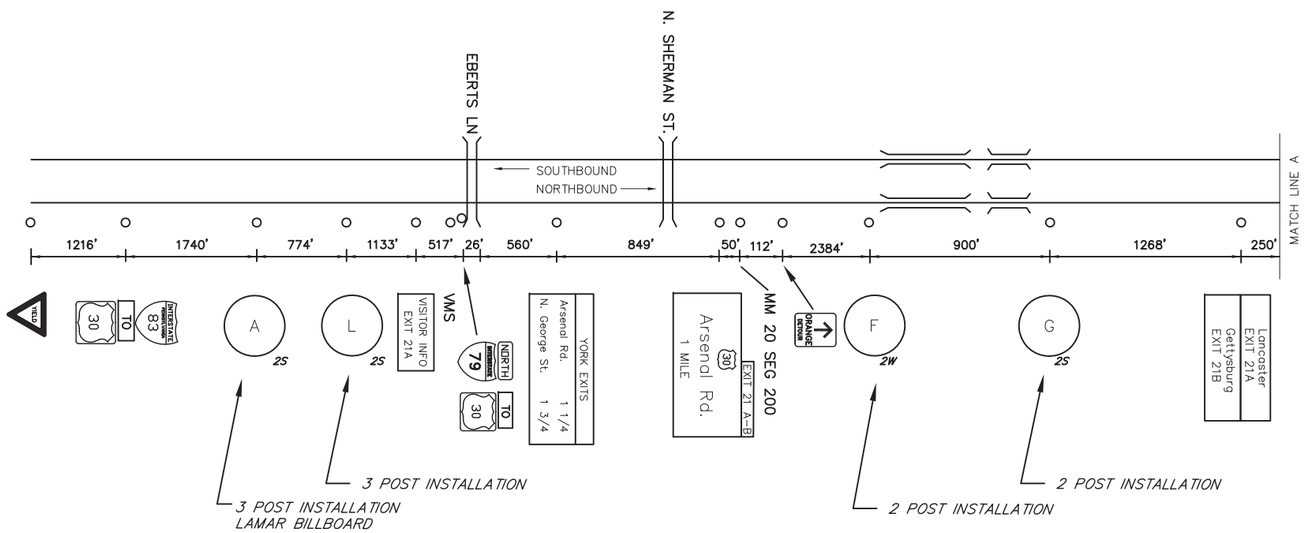


MAINLINE SCHEMATIC
NOT TO SCALE

## LEGEND

2S/2W – GUIDE RAIL

FREEWAY LANE CLOSURES & RESTRICTIONS
ONLY PERMITTED BETWEEN 9:00 PM AND
6:00 AM MONDAY THRU FRIDAY.
DO NOT WORK DURING HOLIDAY PERIODS.

### EXIT 21 SPECIFIC INFORMATION PANEL

| LEGEND | DIRECTION | BUSINESS | LOGO. NO. |
|---|---|---|---|
| FOOD | 21A NB | STARBUCKS | 1 |
| | | ROUND THE CLOCK DINER (24 HRS) | 13 |
| | | QDOBA MEXICAN GRILL | 7 |
| | | | |
| | | | |
| | | | |
| | 21B NB | WENDY'S | 2 |
| | | HARDEE'S | 8 |
| | | | |
| LODGING | 21A NB | DAYS INN & SUITES | 3 |
| | | MOTEL 6 (323 Arsenal Rd) | 4 |
| | | TRU BY HILTON | 6 |
| | 21B NB | MOTEL 6 (125 Arsenal Rd) | 5 |
| | | SUPER 8 | 9 |
| | | | |
| GAS | 21A NB | SHEETZ (DIESEL) | 15 |
| | | | |
| | | | |
| | 21B NB | RUTTERS (24 HOURS/DIESEL) | 16 |
| | | | |
| | | | |
| ATTRACTION | 21A NB | HARLEY DAVIDSON FACTORY TOURS | 14 |
| | | | |
| | | | |

### NB SIGNS

| | |
|---|---|
| GAS – EXIT 21A: 15 / GAS – EXIT 21B: 16 | 12'Hx16'W, 48" LOGO, W12x26, 3M TYPE III, B650 – #2, #1, 2 POST INSTALLATION |
| FOOD – EXIT 21A: 1, 7, 13 / FOOD – EXIT 21B: 8, 2, X | 12'Hx19'W, W14x30 A572, 3M TYPE III, B650 – #2, #2, 2 POST INSTALLATION |
| LODGING – EXIT 21A: 3, 4, 6 / LODGING – EXIT 21B: 5, 9, X | 12'Hx19'W, W14x30 A572, 3M TYPE III, B650 – #2, #1, #1, 3 POST INSTALLATION |
| ATTRACTION – EXIT 21A: 14 / ATTRACTION – EXIT 21B: X | 12'Hx19'W, W14x30 A572, 3M TYPE III, B650 – #2, #2, #1, 3 POST INSTALLATION |

| TABULATION OF QUANTITIES | | |
|---|---|---|
| ITEM | UNIT | QUANTITY |
| POST MOUNTED SIGNS, TYPE B TODS | SQ.FT. | |
| POST MOUNTED SIGNS, TYPE E TODS | SQ.FT. | -- |
| FLAT SHEET PANEL REPLACEMENT | SQ.FT. | -- |
| MAINTENANCE & PROTECTION OF TRAFFIC AND OTHER ANCILLARY WORK AS DIRECTED | LS | INCLUDED |

**SYMBOLS**

- ○ *Existing Sign to Remain*
- △ *Existing Sign to be Removed*
- □ *Existing Sign Reset as Shown*
- ● NEW SIGN
- × FUTURE SIGN
- Ø *Existing Utility Pole*




72" WIDE x 24" HIGH
ON US 30 WB (ARSENAL RD)
BEFORE GEORGE ST.
WHITE LEGEND / BLUE BACKGROUND

****NEW HOSPITAL OPENING DATE IS SCHEDULED FOR AUGUST 18, 2019****

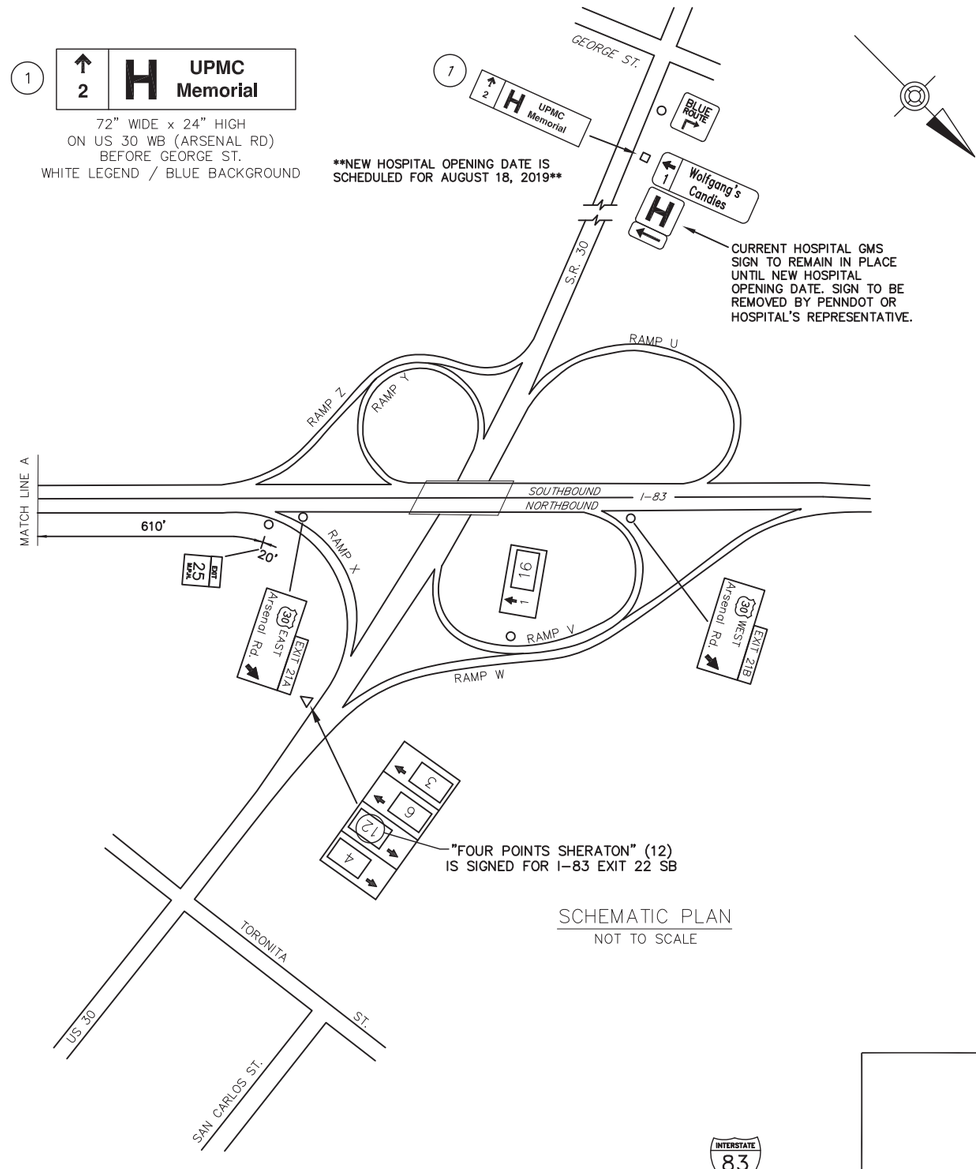


SCHEMATIC PLAN
NOT TO SCALE

INTERSTATE 83

U.S. 30 ARSENAL ROAD

EXIT 21

D:\2015_JOBS\225076-01\WW\PSE\AS-BUILT DRAWINGS\PENNDOT DISTRICT 08\YORK - 66\10-XX SHTOX-I83_EXIT 21 PLAN
June/21/2019 3:49 PM